

3CFPV Series Push Pull



Introduction


The 3CFPV series ISO 7241-A couplers are the ideal choice where a tough, durable product of superior quality is required. They are perfectly suited to agricultural applications.

Construction

- ◆ Carbon steel with trivalent plating
- ◆ Standard seals are Nitrile

Features

- ◆ Poppet valves prevent leakage when uncoupled
- ◆ Locking ball system allows for quick connect and disconnect
- ◆ Socket and plug machined from solid bar stock
- ◆ Double acting sleeve for one handed push to connect when coupler is clamped or bulkhead mounted

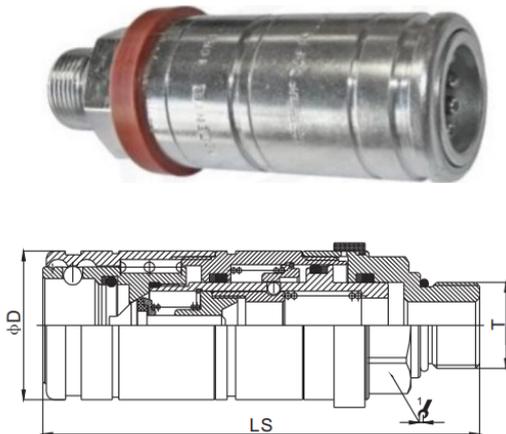

Specification

- ◆ Operating temperature with standard NBR seals -20°C (-20°F) to 120°C (248°F)

Applications

- ◆ Agriculture - Tractors
- ◆ Mobile equipment

Accessories

- ◆ Dust caps and plugs in colours black, blue, red, green & yellow
- ◆ Flip caps available in black, blue, red, green, yellow, orange

Part #	LS	D		T
3CFPV-22M	111.2	38	32	M22*1.5
3CFPV-08G	111.5	38	32	G 1/2
3CFPV-06GBH	162	38	32	G 3/8
3CFPV-08GBH	162	38	32	G1/2
3CFPV-12LBH	162	38	32	M18*1.5
3CFPV-15LBH	162	38	32	M22*1.5
3CFPV-0813OBH	162	38	32	ORFS 13/16
3CFPV-0816OBH	162	38	32	ORFS 1"

** BH = Bulkhead Fitting