

# T20 Series Diagnostic Couplers M16\*2




## Introduction

T20 couplers provide easy connection to mechanical gauges or specialised diagnostic equipment. T20 couplers are usually permanently threaded in the test ports on the machine with the coupler attached to the test instrument by a hose.

## Construction

- ◆ Carbon steel with Zinc Nickel plating
- ◆ Standard seals Nitrile



## Features

- ◆ Poppet valves
- ◆ Metal cap attached by a chain
- ◆ Critical parts are hardened for durability
- ◆ Parts machined from solid bar stock

## Specification

- ◆ Operating temperature with standard NBR seals -20°C (-20°F) to 120°C (248°F)


Size	1/4
MWP (PSI)	9000
Flow (LPM)	2.0

## Applications

- ◆ Agriculture
- ◆ Mobile equipment
- ◆ Construction equipment



Any application where test equipment is used

**Many other combinations available, contact for information and availability.**

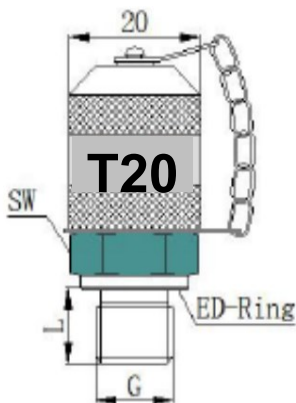

Part #	Thread G	L mm	SW mm
T20-1/8GED	1/8 BSP	8	17
T20-1/4GED	1/4 BSP	12	19

Part #	Thread G	L mm	SW mm
T20-7/16U	7/16 UNO	11	17
T20-9/16U	9/16 UNO	12	17
T20-M10*1	M10*1	9.8	17

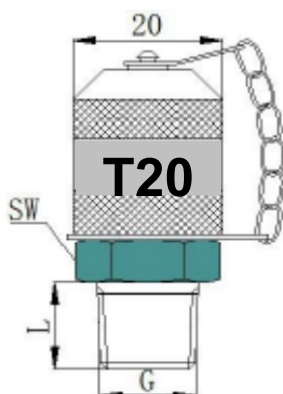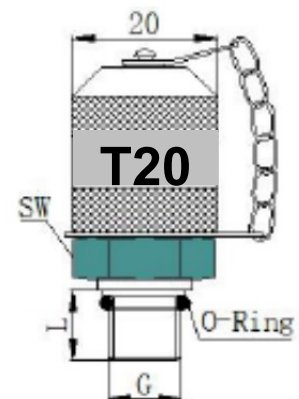

Part #	Thread G	L mm	SW mm
T20-1/8K	1/8 BSPT	8	17
T20-1/4K	1/4 BSPT	12	17
T20-1/4N	1/4 NPT	16	17