Phone: 021 161 0867 Quick Couplers

VV Series Screw Coupler

Introduction

The VV series is a screw together coupler that can also take the agricultural standard nipples. This make the VV series a very versatile coupler.

Construction

- ♦ Carbon steel with trivalent plating
- ♦ Standard seals are Nitrile
- Poppet valves and a locking ball system

Features

- ♦ Poppet valves prevent leakage when uncoupled
- Locking ball system allows for quick connect and disconnect when used with agricultural nipples
- ♦ Socket and plug machined from solid bar stock
- ♦ Can be screwed together under residual pressure

Hydrauli

Specification

 Operating temperature with standard NBR seals –20°C (-20°F) to 120°C (248°F)


Applications

- Agriculture
- ♦ Mobile equipment
- ♦ Construction equipment

Accessories

♦ Dust caps and plugs available in aluminium

Part #	A	В	C	ш	AF1	AF2	Т	MWP (Bar)
VVF-04G	66	50	33	30	19	27	G1/4	350
VVF-06G	78	59.5	39	38	24	34	G3/8	300
VVF-08G	94.5	68	49	42	27	38	G1/2	280
VVF-12G	123.5	84	61.5	55	34	50	G3/4	250
VVF-16G	139.5	99.5	73	60	41	55	G1	210

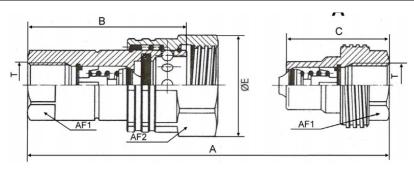







PK Series Nipples

Email: sales@hydconnect.com