

S4 Series ISO 5675



Introduction


The S4 series ISO 5675 couplers are the ideal choice where a tough, durable product of superior quality is required. They are perfectly suited to agricultural and industrial applications.

Construction

- ♦ Carbon steel with trivalent plating
- ♦ Standard seals are Nitrile

Features

- ♦ Hard Chrome alloy balls are used for valving
- ♦ Locking ball system allows for quick connect and disconnect
- ♦ Socket and plug machined from solid bar stock

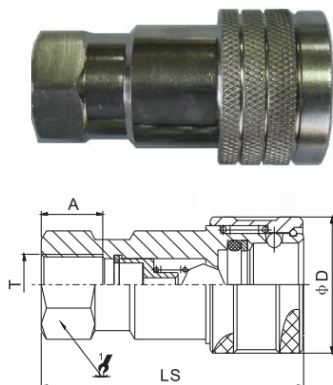

Specification

- ♦ Operating temperature with standard NBR seals -20°C (-20°F) to 120°C (248°F)

Applications


- ♦ Agriculture
- ♦ Mobile equipment
- ♦ Construction equipment

Accessories

- ♦ Dust caps and plugs in colours black, blue, red, green & yellow

Part #	LS	D		A	T
S4F-04G	53.5	27.6	18	12.5	G1/4
S4F-06G	63	34	24	13	G3/8
S4F-08G	66.3	38.6	27	16	G1/2
S4F-12G	83.5	48.2	35	18	G3/4
S4F-16G	96.5	56	41	21	G1

- ♦ Note: The S4F-12G is the Parker interchange
See NS series for the Faster interchange

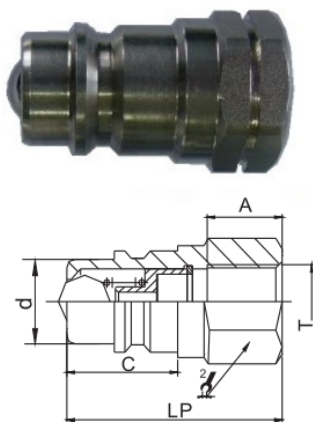

Part #	LP	d	C		A	T
S4M-04G	36	14.2	18.5	19	12.5	G1/4
S4M-06G	40	19	22	24	13	G3/8
S4M-08G	43.5	20.5	27	27	16	G1/2
S4M-12G	51	26.9	28.5	33.3	18	G3/4
S4M-16G	63	31.3	38	41	21	G1

- ♦ Note: The S4F-12G is the Parker interchange
See NS series for the Faster interchange