



**TC Series**

**Introduction:**

TC series are used in high pressure applications with hydraulic and mechanical shock. Steel coupler sleeve and nipple are hardened for resistance to damage. Available in 3/8 size only. Sleeve lock is standard to guard against accidental disconnection.

**Specification:**


- ◆ Operating temperature with standard NBR seals -20°C (-20°F) to 120°C (248°F)


**Features:**

- ◆ Rated pressure up to 10,000 psi
- ◆ Manual sleeve operation
- ◆ Standard sleeve lock
- ◆ Socket and plug machined from solid bar stock
- ◆ Carbon steel with trivalent plating
- ◆ Positive valve stop prevents flow checking

**Applications:**

- ◆ Hydraulic jacking & house moving
- ◆ Railway maintenance
- ◆ Construction equipment

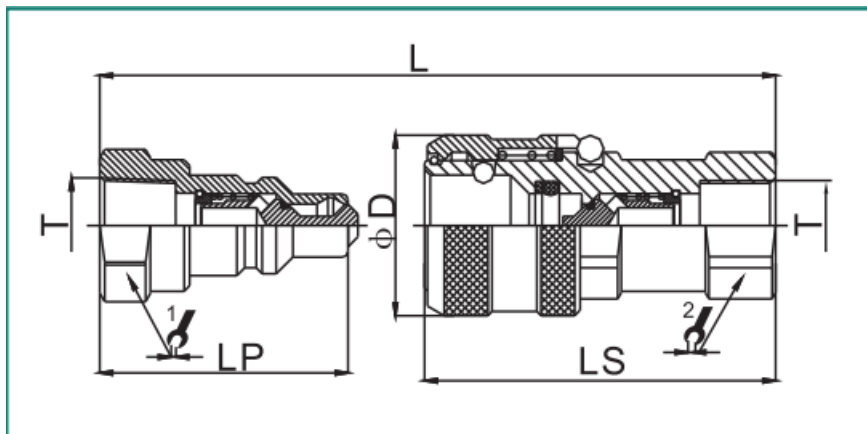

Part #	T	D		L	LS	LP
TCF-06N	NPT 3/8	32	24	79	62.5	
TCM-06N	NPT 3/8		24			44.2