

300 Series Air Couplers "Aro 210"





Introduction

The 300 series is the ideal choice when a tough, durable product of superior quality is required.

Features

- ◆ Single hand operation
- ◆ Light weight
- ◆ Large flow valve
- ◆ Interchange: Parker 50 series, ARO 210 & Rectus 22KA

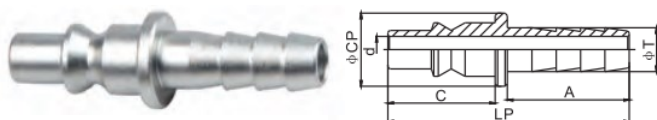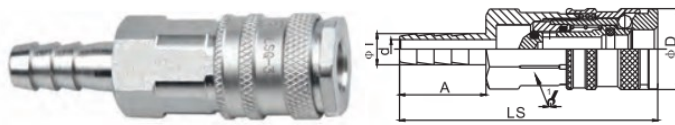

Specification

- ◆ Operating temperature with standard NBR seals -20°C (-20°F) to 120°C (248°F)
- ◆ MWP 232 PSI

| Part # | LS | D | | A | T | d |
|----------|------|------|----|----|----|-----|
| 300-07SH | 69.8 | 23.3 | 20 | 20 | 7 | 4 |
| 300-09SH | 74.8 | 23.3 | 20 | 25 | 9 | 5.5 |
| 300-11SH | 74.8 | 23.3 | 20 | 25 | 11 | 7.5 |

| Part # | LS | D | | A | T BSPP | d |
|----------|------|------|----|----|-----------|----|
| 300-04SF | 59.8 | 23.3 | 20 | 13 | 1/4 | 14 |
| 300-06SF | 59.8 | 23.3 | 22 | 12 | 3/8 | 14 |

| Part # | LS | D | | A | T BSPT | d |
|----------|------|------|----|----|-----------|------|
| 300-04SM | 62.8 | 23.3 | 20 | 13 | 1/4 | 7.8 |
| 300-06SM | 60.8 | 23.3 | 20 | 13 | 3/8 | 11.3 |

| Part # | LP | C | | A | T BSPT | d |
|----------|------|----|----|----|-----------|-----|
| 300-07PM | 41 | 22 | 14 | 13 | 1/4 | 5.4 |
| 300-09PM | 41.5 | 22 | 17 | 13 | 3/8 | 5.4 |

| Part # | LP | C | | A | T BSPT | d |
|----------|----|----|----|----|-----------|-----|
| 300-04PF | 38 | 22 | 17 | 13 | 1/4 | 5.4 |
| 300-06PF | 38 | 22 | 19 | 13 | 3/8 | 5.4 |

| Part # | LS | C | CP | A | T | d |
|----------|------|----|----|----|----|-----|
| 300-07PH | 44.5 | 22 | 15 | 20 | 7 | 5.4 |
| 300-09PH | 49.5 | 22 | 15 | 25 | 9 | 5.4 |
| 300-11PH | 49.5 | 22 | 15 | 25 | 11 | 5.4 |