

3CFPV Series Push Pull



Introduction


The 3CFHF/3CFPV series ISO 7241-A couplers are the ideal choice where a tough, durable product of superior quality is required. They are perfectly suited to agricultural applications.

Construction

- ◆ Carbon steel with trivalent plating
- ◆ Standard seals are Nitrile

Features

- ◆ Poppet valves prevent leakage when uncoupled
- ◆ Locking ball system allows for quick connect and disconnect
- ◆ Socket and plug machined from solid bar stock
- ◆ One handed, push to connect and pull to disconnect when coupler is clamped or bulkhead mounted

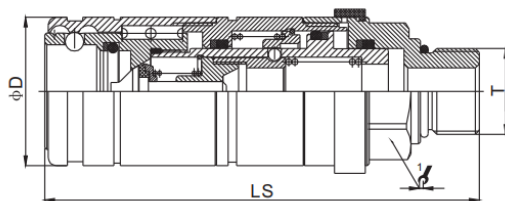

Specification

- ◆ Operating temperature with standard NBR seals -20°C (-20°F) to 120°C (248°F)


Applications

- ◆ Agriculture -Tractors
- ◆ Mobile equipment

Accessories

- ◆ Dust caps and plugs in colours black, blue, red, green, orange & yellow
- ◆ Flip caps available in black, blue, red, green, yellow, orange

3CFPV-22M AS BEEN REPLACED WITH 3CFHF-22M HIGH FLOW

Part #	LS	D		T
3CFHF22M	111.2	38	32	M22*1.5
3CFPV-06GM	111.5	38	32	G 3/8
3CFPV-08GF	111.5	38	32	G 1/2
3CFPV-08NF	111.5	38	32	N 1/2
3CFPV-22MBH	123.4	38	32	M22*1,5 BH
3CFPV-06GBH	126	38	32	G 3/8 *
3CFPV-08GBH	126	38	32	G1/2 *
3CFPV-12LBH	126	38	32	M18*1.5 *
3CFPV-0813OBH	126	38	32	ORFS 13/16 *
3CFPV-0816OBH	126	38	32	ORFS 1" *