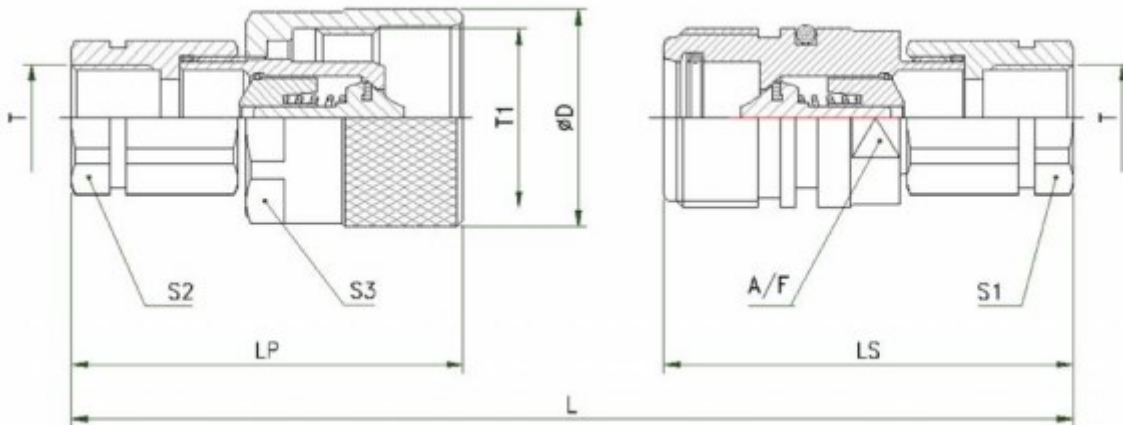


CVV Series ISO 14541**Features:**

- ◆ Connect Screw
- ◆ Disconnect Screw
- ◆ Material Steel
- ◆ Seals NBR
- ◆ Valve Poppet
- ◆ Connection under residual pressure allowed

Interchange:

Faster	CVV
Parker	QHPA
Stucchi	VD
Holmbury	HS
DNP	PVV3
Dixon	CVV
Stauff	HS

**Note: Only sizes up to 3/4 meet the ISO 14541 standard.
The male part # with GH are the heavy duty hex nuts**

Body Size	Thread	Female	Male	L	LP	LS	Dia D	S1	S2	S3
1/4	1/4 BSP	CVVF-04G	CVVM-04G	92.6	58.6	60	34	19	19	30
3/8	3/8 BSP	CVVF-06G	CVVM-06G	89.9	60.8	55.3	34	22	22	30
1/2	1/2 BSP	CVVF-08G	CVVM-08G	103	67.7	61.5	42	27	27	36
3/4	3/4 BSP	CVVF-12G	CVVM-12GH	125	73.5	83.5	48	36	36	41
1"	3/4 BSP	CVVF-1612G	CVVM-1612GH	155	94.5	64.5	56.5	41	41	51
1"	1" BSP	CVVF-16G	CVVM-16GH	155	94.5	64.5	56.5	41	41	51
1 1/2	1 1/4 BSP	CVVF-20G	CVVM-20G	196	120	126	80	65	65	70
1 1/2	1 1/2 BSP	CVVF-24G	CVVM-24G	196	120	126	80	65	65	70

Size	1/4	3/8	1/2	3/4	1"	1 1/2
MWP (PSI)	5000	5000	5000	4500	4500	4000
Flow (LPM)	13	25	65	100	205	450

Aluminum caps and plugs available