
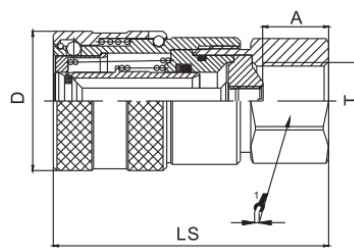


FF Series Couplers BSP Thread

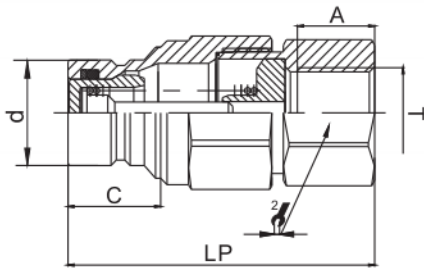

Features:

- ◆ Push to connect
- ◆ Pull collar back to disconnect
- ◆ Flat Valves
- ◆ Seals NBR
- ◆ Material steel
- ◆ Conforms to ISO 16208 stand-



Common Interchange:

- ◆ Parker FEM
- ◆ Faster FFH
- ◆ Stucchi FIRG
- ◆ Holmbury HQ
- ◆ DNP PLT4
- ◆ Aeroquip FF/FD89

Size	1/8	1/4	3/8	1/2	5/8	3/4	1"
MWP PSI	6000	6000	5000	5000	5000	5000	5000
Flow LPM	12	25	50	110	125	160	230

Body Size	Thread	Female	Male	LP	LS	S1	S2	Dia D	Dia d
1/8	1/8 BSP	FFF-02G	FFM-02G	34	36	18	18	24	11.6
1/4	1/4 BSP	FFF-04G	FFM-04G	49.2	58.2	20	20	28	16.1
3/8	3/8 BSP	FFF-06G	FFM-06G	55.8	68.2	24	24	32	19.7
3/8	1/2 BSP	FFF-0608G	FFM-0608G	59.8	72.2	27	27	32	19.7
1/2	1/2 BSP	FFF-08G	FFM-08G	72	75	32	32	38	24.5
1/2	3/4 BSP	FFF-0812G	FFM-0812G	76	79	36	36	38	24.5
5/8	3/4 BSP	FFF-1012G	FFM-1012G	75.5	80	36	36	42	27
3/4	3/4 BSP	FFF-12G	FFM-12G	93.8	99.8	41	41	48	30
3/4	1" BSP	FFF-1216G	FFM-1216G	93.8	99.8	41	41	48	30
1"	1" BSP	FFF-16G	FFM-16G	93.8	99.8	41	41	56	36
1"	1 1/4 BSP	FFF-1620G	FFM-1620G	90	115.5	55	55	56	36

FF Series Couplers UNO Thread

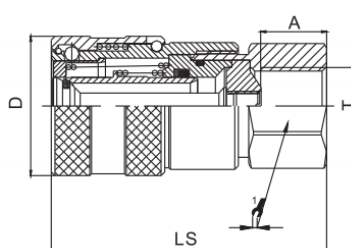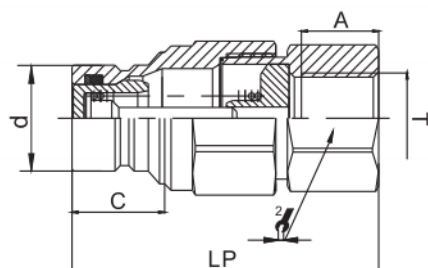

Features:

- ◆ Push to connect
- ◆ Pull collar back to disconnect
- ◆ Flat Valves
- ◆ Seals NBR
- ◆ Material steel
- ◆ Conforms to ISO 16208 stand-

Common Interchange:

- ◆ Parker FEM
- ◆ Faster FFH
- ◆ Stucchi FIRG
- ◆ Holmbury HQ
- ◆ DNP PLT4
- ◆ Aeroquip FF/FD89

Size	1/8	1/4	3/8	1/2	5/8	3/4	1"
MWP PSI	6000	6000	5000	5000	5000	5000	5000
Flow LPM	12	25	50	110	125	160	230

Body Size	Thread	Female	Male	LP	LS	S1	S2	Dia D	Dia d
1/4	9/16 UNO	FFF-0409U	FFM-0409U	49.2	58.2	20	20	28	16.1
3/8	9/16 UNO	FFF-0609U	FFM-0609U	55.8	68.2	24	24	32	19.7
3/8	3/4 UNO	FFF-0612U	FFM-0612U	55.8	55.8	24	24	32	19.7
1/2	3/4 UNO	FFF-0812U	FFM-0812U	72	75	32	32	38	24.5
1/2	7/8 UNO	FFF-0814U	FFM-0814U	76	79	36	36	38	24.5
1/2	1 1/16 UNO	FFF-0817U	FFM-0817U	76	79	36	36	38	24.5
5/8	1 1/16 UNO	FFF-1017U	FFM-1017U	76	80	36	36	42	27
3/4	1 1/16 UNO	FFF-1217U	FFM-1217U	93.8	99.8	41	41	48	30