

NS Series ISO 5675 (Faster Interchange)



Introduction

The NS series ISO 5675 couplers are the ideal choice where a tough, durable product of superior quality is required. They are perfectly suited to agricultural and industrial applications.

Construction

- ◆ Carbon steel with trivalent plating
- ◆ Standard seals are Nitrile

Features

- ◆ Hard Chrome alloy balls are used for valving
- ◆ Locking ball system allows for quick connect and disconnect
- ◆ Socket and plug machined from solid bar stock

Specification


- ◆ Operating temperature with standard NBR seals -20°C (-20°F) to 120°C (248°F)


Applications


- ◆ Agriculture
- ◆ Mobile equipment
- ◆ Construction equipment


Accessories

- ◆ Dust caps and plugs in colours black, blue, red, green & yellow

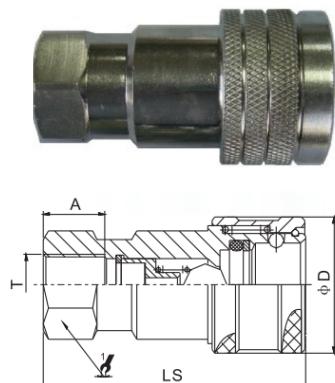

Part #	LS	D		A	T
NSF-12G	83.5	48.2	35	18	G3/4

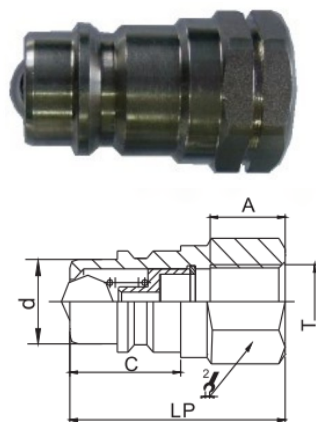

Part #	LP	d	C		A	T
S4M-12G	51	26.9	28.5	33.3	18	G3/4