

NV Series ISO 5675 (faster Interchange)



Introduction

The NV series ISO 5675 couplers are the ideal choice where a tough, durable product of superior quality is required. They are perfectly suited to agricultural and industrial applications.

Construction

- ♦ Carbon steel with trivalent plating
- ♦ Standard seals are Nitrile

Features

- ♦ Poppet valves prevent leakage when uncoupled
- ♦ Locking ball system allows for quick connect and disconnect
- ♦ Socket and plug machined from solid bar stock

Specification


- ♦ Operating temperature with standard NBR seals -20°C (-20°F) to 120°C (248°F)


Applications

- ♦ Agriculture
- ♦ Mobile equipment
- ♦ Construction equipment


Accessories


- ♦ Dust caps and plugs in colours black, blue, red, green & yellow

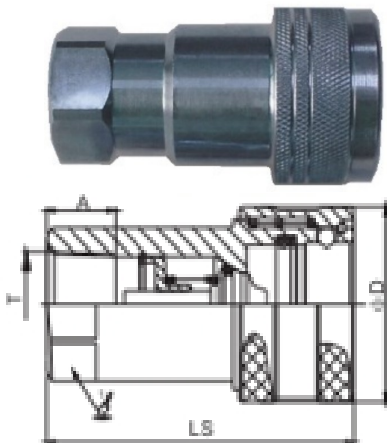

Part #	LS	D		A	T
NVF-12G	83	47.5	35	18	G3/4

For other sizes in the NV range use our PK series

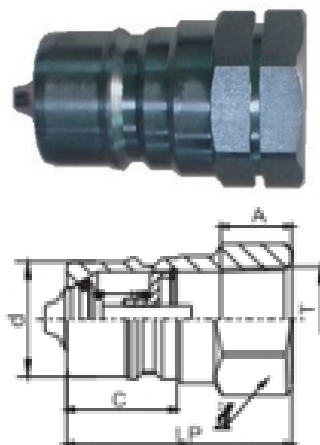

Part #	LP	d	C		A	T
NVM-12G	51	26.9	28	35	18	G3/4