

RSD Coupler



Introduction:

The RSD coupler is Parkers equivalent to the Faster 3CFPV agricultural push pull couplers.

Can be connected with male under residual pressure.
Has a breakaway function and can be screwed direct into a port.

Construction:

- Carbon steel with trivalent plating
- Standard seals are nitrile
- Poppet valves

Features:


- Manufactured to ISO-7241A specifications
- Push-Pull feature (Breakaway Function)
- Connectable under residual pressure, male side
- Light weight reduced dimensions
- Alternative to 3CFHF-22M

Specifications:

Operating temperature with standard Nitrile seals -20°C to $+120^{\circ}\text{C}$

Applications:

- Agricultural machines
- Mobile equipment
- Construction equipment

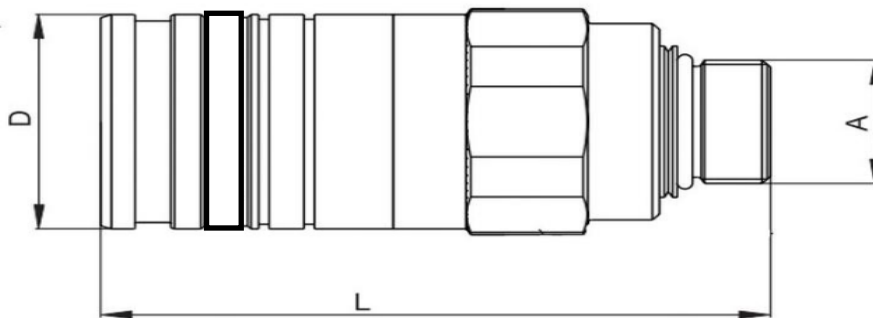

| Part # | L | D | A |
|---------|------|----|---------|
| RSD-22M | 94.5 | 38 | M22*1.5 |