


S1 Series ISO7241-A

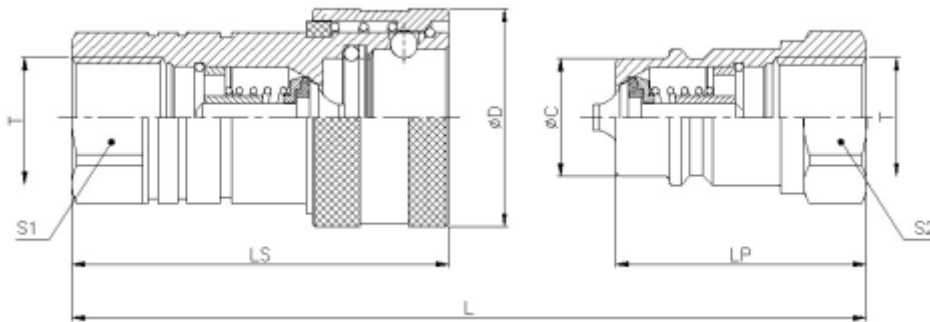

Features:

- ◆ Pull collar back to connect
- ◆ Pull collar back to disconnect
- ◆ Poppet valves
- ◆ Seals NBR & PTFE backup ring
- ◆ Material steel, machined from solid bar stock
- ◆ Conforms to ISO 7241-A standard

Interchange:

- ◆ Parker 6600
- ◆ Faster ANV
- ◆ Aeroquip 5600
- ◆ Stucchi BIR
- ◆ Homlbury IA
- ◆ DNP PAV1

Body Size	Thread	Female	Male	LP	LS	S1	S2	Dia D	L	Dia C
1/4	1/4 BSP	S1F-04G	S1M-04G	35.5	53	19	19	26	71	11.8
3/8	3/8 BSP	S1F-06G	S1M-06G	36.5	55	22	22	31.5	75	17.3
1/2	3/8 BSP	S1F-0806G	S1M-0806G	43.5	66	27	27	38.5	88	20.5
1/2	1/2 BSP	S1F-08G	S1M-08G	43.5	66	27	27	38.5	88	20.5
1/2	1/2 NPT	S1F-08N	S1M-08N	43.5	66	27	27	38.5	88	20.5
1/2	3/4 UNO	S1F-12U	S1M-12U	43.5	66	27	27	38.5	88	20.5
1/2	7/8 UNO	S5F-14U	S1M-14U	43.5	66	27	27	38.5	88	20.5
1/2	M18*1.5	S1F-08FM18	S1M-08FM18	43.5	66	27	27	38.5	88	20.5
1/2	M22*1.5	S1F-08FM22	S1M-08FM22	43.5	66	27	27	38.5	88	20.5
3/4	3/4 BSP	S1F-12G	S1M-12G	57	80	34	34	48	110	29
1"	1" BSP	S1F-16G	S1M-16G	59.5	94	41	41	56	119.5	34.3
1 1/4	1 1/4 BSP	S1F-20G	S1M-20G	75	117	50	50	69.5	150	45
1 1/2	1 1/2 BSP	S1F-24G	S1M-24G	83.5	133	60	60	84	167.5	55
2"	2" BSP	S1F-32G	S1M-32G	105	165	75	75	99	210.5	65

Dust caps and plugs available in, Black, Blue, Red, Green, Yellow and Orange