




# S1Y Series ISO7241-A Connect Under Pressure

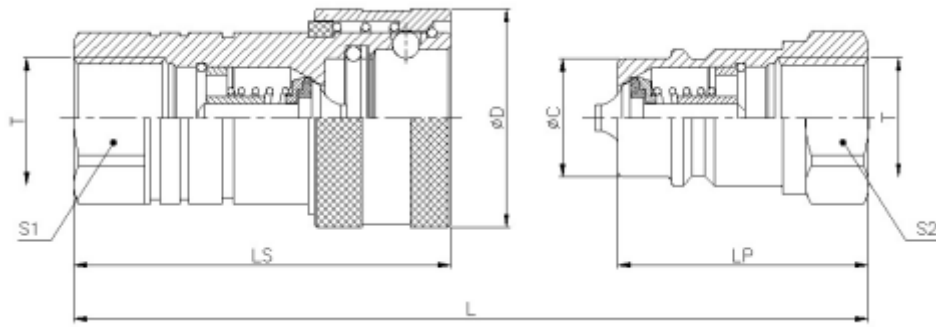

**Features:**

- ◆ Pull collar back to connect
- ◆ Pull collar back to disconnect
- ◆ Poppet valves
- ◆ Seals NBR & PTFE backup ring
- ◆ Material steel, machined from solid bar stock
- ◆ Conforms to ISO 7241-A standard
- ◆ Connects under pressure

**Interchange:**

- ◆ Parker 8010 DC
- ◆ Faster 4NV
- ◆ Aeroquip FD72
- ◆ Stucchi BIR PC
- ◆ Homlbury IAPC
- ◆ DNP PKK1

Body Size	Thread	Female	Male	LP	LS	S1	S2	Dia D	L	Dia C
1/2	1/2 BSP	S1YF-08G	S1YM-08G	43.5	66	27	27	38.5	88	20.5

Should only be connected when one half is pressurized, do not try to connect if both halves are under pressure

Dust caps and plugs available in, Black, Blue, Red, Green, Yellow and Orange