


S2 Series ISO7242-B "304 Stainless Steel"

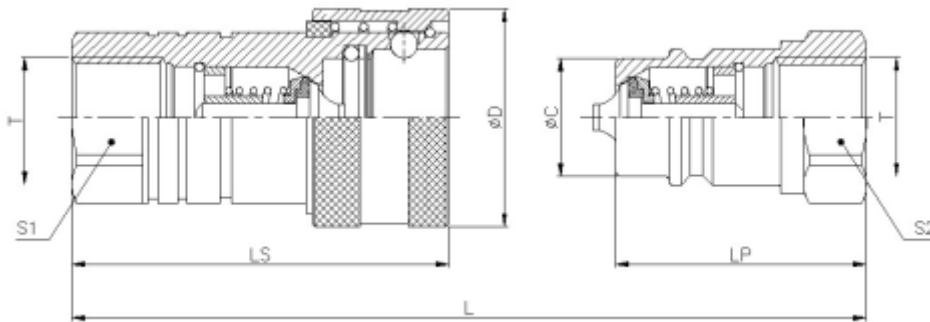

Features:

- ◆ Pull collar back to connect
- ◆ Pull collar back to disconnect
- ◆ Poppet valves
- ◆ Seals VITON & PTFE backup ring
- ◆ Material 304 SS, machined from solid bar stock
- ◆ Conforms to ISO 7242-B standard

Interchange:

- ◆ Parker 60 –SH62/63
- ◆ Faster HNV
- ◆ Aeroquip FD45/HK
- ◆ Snap-Tite S72
- ◆ Stauff IB
- ◆ Dixon H

Body Size	Thread	Female	Male	L	LS	S1	S2	Dia D	LP	Dia C
1/8	1/8 BSP	S2F-02GS	S2M-02GS	58.5	48	14	14	24	29	10.8
1/4	1/4 BSP	S2F-04GS	S2M-04GS	72.5	58	19	17	27	36	14.2
3/8	3/8 BSP	S2F-06GS	S2M-06GS	80.5	65	22	22	35	40	19
1/2	1/2 BSP	S2F-08GS	S2M-08GS	89	72.5	29	27	45	44	23.5
3/4	3/4 BSP	S2F-12GS	S2M-12GS	105	88	36	36	54	52	31.5
1"	2" BSP	S2F-16GS	S2M-16GS	124.5	102	41	41	64.5	62	37.8

Size	1/8	1/4	3/8	1/2	3/4	1"
Max WP PSI	2000	2000	1500	1500	1500	1000
Flow L/Min	4	11	23	45	105	189

Dust caps and plugs available in, Red.