


## S2 Series ISO7242-B "316 Stainless Steel"

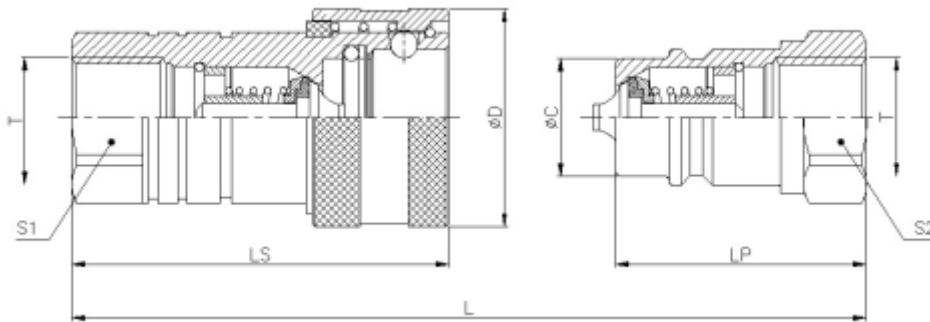

### Features:

- ◆ Pull collar back to connect
- ◆ Pull collar back to disconnect
- ◆ Poppet valves
- ◆ Seals VITON & PTFE backup ring
- ◆ Material 316 SS, machined from solid bar stock
- ◆ Conforms to ISO 7242-B standard

### Interchange:

- ◆ Parker 60 –SSH62/63
- ◆ Faster HNV
- ◆ Aeroquip FD45/HK
- ◆ Stucchi IRBX
- ◆ Holmbury IBS
- ◆ DNP PBVX

Body Size	Thread	Female	Male	L	LS	S1	S2	Dia D	LP	Dia C
1/8	1/8 BSP	S2F-02GSS	S2M-02GSS	62.5	50	17	14	24	31	10.8
1/4	1/4 BSP	S2F-04GSS	S2M-04GSS	72.2	58	19	19	28.5	36	14.2
3/8	3/8 BSP	S2F-06GSS	S2M-06GSS	80.5	65	24	24	35	40	19
1/2	1/2 BSP	S2F-08GSS	S2M-08GSS	91.5	73.4	30	27	42	45.5	23.5
3/4	3/4 BSP	S2F-12GSS	S2M-12GSS	112.5	92	36	36	54	56	31.5
1"	2" BSP	S2F-16GSS	S2M-16GSS	126.5	103	41	45	65	63	37.8

Size	1/8	1/4	3/8	1/2	3/4	1"
Max WP PSI	2000	2000	2000	1500	1500	1000
Flow L/Min	4	11	23	45	105	189

Also available with NPT threads, change GSS to NSS

Dust caps and plugs available in, Red.