


S2 Series ISO7242-B "Brass"

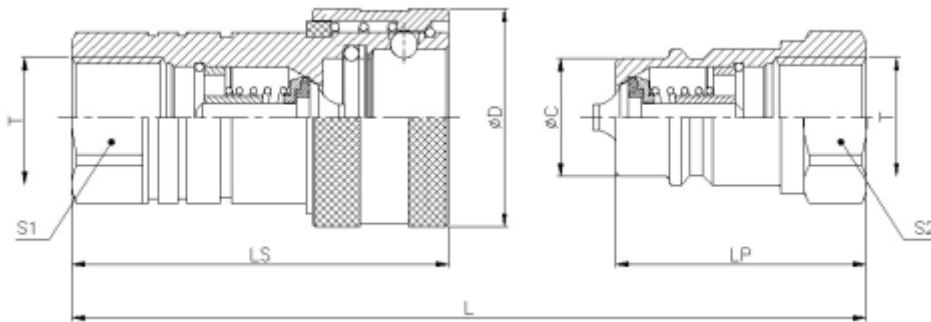

Features:

- ◆ Pull collar back to connect
- ◆ Pull collar back to disconnect
- ◆ Poppet valves
- ◆ Seals NBR & PTFE backup ring
- ◆ Material brass, machined from solid bar stock
- ◆ Conforms to ISO 7242-B standard

Interchange:

- ◆ Parker 60 –BH60/61
- ◆ Faster HNV
- ◆ Aeroquip FD45/HK
- ◆ Stucchi IRBO
- ◆ Holmbury IBB
- ◆ DNP PBVM

Body Size	Thread	Female	Male	L	LS	S1	S2	Dia D	LP	Dia C
1/8	1/8 BSP	S2F-02GB	S2M-02GB	58.5	48	14	14	24	29	10.8
1/4	1/4 BSP	S2F-04GB	S2M-04GB	72	58	19	17	27	36	14.2
3/8	3/8 BSP	S2F-06GB	S2M-06GB	80.5	65	22	22	35	40	19
1/2	1/2 BSP	S2F-08GB	S2M-08GB	89	72.5	29	27	45	44	23.5
3/4	3/4 BSP	S2F-12GB	S2M-12GB	105	88	36	36	54	52	31.5
1"	2" BSP	S2F-16GB	S2M-16GB	124.5	102	41	41	64.5	62	37.8

Size	1/8	1/4	3/8	1/2	3/4	1"
Max WP PSI	1000	1000	1000	1000	1000	1000
Flow L/Min	4	11	23	45	105	189

Also available with NPT threads, change GB to NB.

Dust caps and plugs available in, Red.