

## S5 Series Push Pull



### Introduction

The S5 series ISO 5675 couplers are the ideal choice where a tough, durable product of superior quality is required. They are perfectly suited to agricultural and industrial applications.

### Construction

- ◆ Carbon steel with trivalent plating
- ◆ Standard seals are Nitrile

### Features

- ◆ Poppet valves prevent leakage when uncoupled
- ◆ Ball valves seal on a coined seat
- ◆ Locking ball system allows for quick connect and disconnect
- ◆ Socket and plug machined from solid bar stock
- ◆ Double acting sleeve for one handed push to connect when coupler is clamped or bulkhead mounted

### Specification


- ◆ Operating temperature with standard NBR seals  $-20^{\circ}\text{C}$  ( $-20^{\circ}\text{F}$ ) to  $120^{\circ}\text{C}$  ( $248^{\circ}\text{F}$ )

### Applications

- ◆ Agriculture
- ◆ Mobile equipment
- ◆ Construction equipment


### Accessories

- ◆ Dust caps and plugs in colours black, blue, red, green & yellow

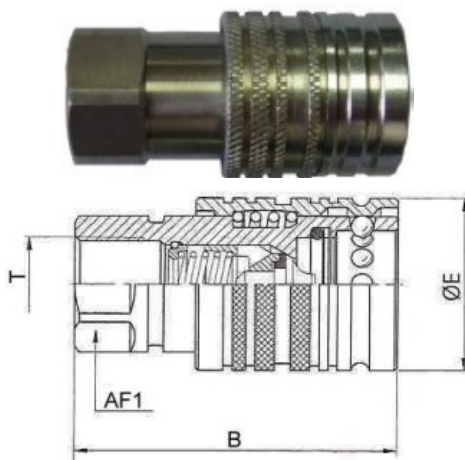

**Poppet Type Use S1M-08 male**

Part #	B	E	AF1	T
S5F-08G	66	38	27	G1/2
S5F-08N	66	38	27	N1/2
S5F-12U	66	38	27	UN3/4
S5F-14U	66	38	27	UN7/8
S5F-08FM22	66	38	27	M22*1.5

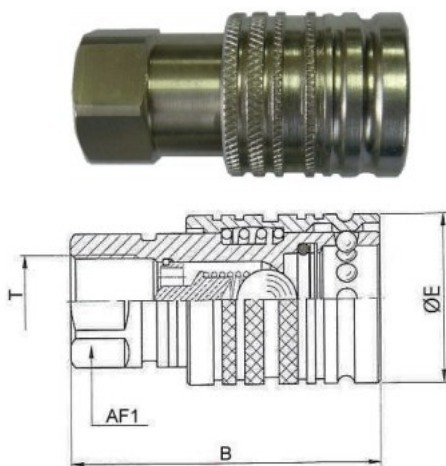

**Ball Type Use S4M-08 male**

Part #	B	E	AF1	T
S5BF-08G	66	38	27	G1/2
S5BF-08N	66	38	24	N1/2
S5BF-12U	66	38	27	UN3/4