

## TF Series Ultra High Pressure Coupler



### Introduction

The TF series Ultra High Pressure couplers are the ideal choice where a tough, durable product of superior quality is required. They are perfectly suited to applications needing 20,000 psi working pressure.

### Construction

- ◆ High resistance steel with trivalent plating
- ◆ Standard seals are Nitrile

### Features

- ◆ Special valve design eliminates spillage when connecting and disconnecting
- ◆ Locking ball system allows for quick connect and disconnect
- ◆ Socket and plug machined from solid bar stock
- ◆ Special materials are used for critical parts and hardened for durability
- ◆ Compatible with Cejn 115 and 116 series


### Specification

- ◆ Operating temperature with standard NBR seals –20°C (–20°F) to 120°C (248°F)

### Applications

- ◆ Hydraulic jacking systems
- ◆ Torque tools
- ◆ Rescue equipment

Size	3/32
MWP (PSI)	21,740
Flow (LMN)	3.78

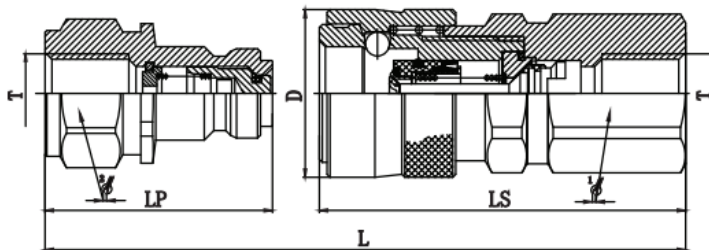

Part #	T	D			L	LS	LP
TFF-04G	G1/4	28	24	22	81	61.2	38
TFM-04G							

