


NV Series ISO 5675

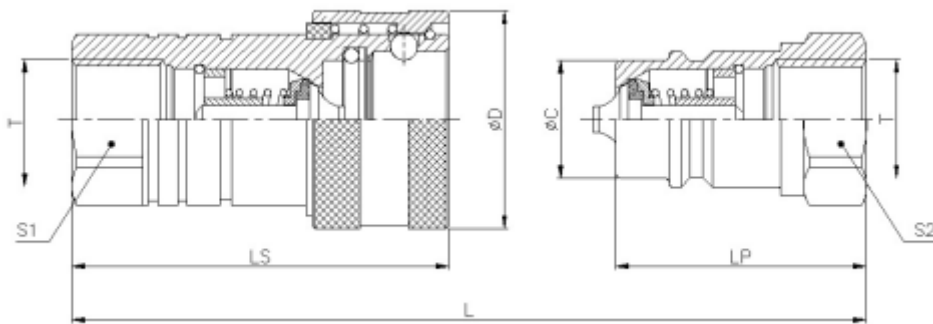

Features:

- ◆ Pull collar back to connect
- ◆ Pull collar back to disconnect
- ◆ Poppet valves
- ◆ Seals NBR & PTFE backup ring
- ◆ Material steel, machined from solid bar stock
- ◆ Conforms to ISO 5675 standard

Interchange:

- ◆ Eaton FD42
- ◆ Faster NV
- ◆ Stauff ID
- ◆ Stucchi IR-V FA
- ◆ Holmbury DINV
- ◆ DNP PDV1

Body Size	Thread	Female	Male	LP	LS	S1	S2	Dia D	L	Dia C
1/4	1/4 BSP	PKF-04G	PKM-04G	35.5	53	19	19	27.6	71	14.2
3/8	3/8 BSP	PKF-06G	PKM-06G	36.5	55	22	22	34	75	19.0
1/2	1/2 BSP	S1F-08G	S1M-08G	43.5	66	27	27	38.5	88	20.5
3/4	3/4 BSP	NVF-12G	NVM-12G	57	80	34	34	47.5	110	28
1"	1" BSP	PKF-16G	PKM-16G	59.5	94	41	41	56.2	119.5	31.3

Dust caps and plugs available in, Black, Blue, Red, sizes 1/4, 3/8 & 1"
 Black, Blue, Red, Green & Yellow for sizes 1/2 & 3/4